


LLT-3

ThinkGrow Smart Mini-Lifter System

The LLT-3 Smart Mini Light Lifter is an advanced lifting device designed specifically for vertical farming racks. It enables efficient suspension of grow lights, sensors, and other equipment within the rack structure. This compact, quiet, and easy-to-install lifter ensures precision, synchronization, and user-friendly operation.

LLT-3 is ETL-listed. Each lifter can lift up to 77lbs/35kg, and the lifting range is up to 37"/940mm. Key features include a lifting capacity of 35kg, automated alignment, and compatibility with the LRC-1 Remote and (HCS-2) Hydro-X Pro Controller for enhanced functionality.

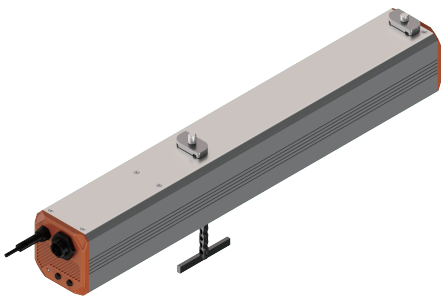

Specifications

LLT-3

Input Voltage

Input Voltage100-277V~, 50/60Hz

Input Power

Input Power≤ 100W

Lifting Capacity

Lifting Range≤ 37" / 0.94m

Maximum Weight Limit≤ 77lbs / 35kg

Package Contents

LLT-3 Smart Mini Lifter	1pc
Power Cable	1pc
4-Pin IP65 Connector Cable	1pc

Package Dimensions


Size	20.47inch / 520 mm(L) x 5.20inch / 132 mm(W) x 4.53inch / 115 mm(H)
Weight	8.05lbs / 3.65kg

Working Environments

Temperature	32-104°F (0-40°C)
Humidity	≤90%RH

Link Up

LLT-3

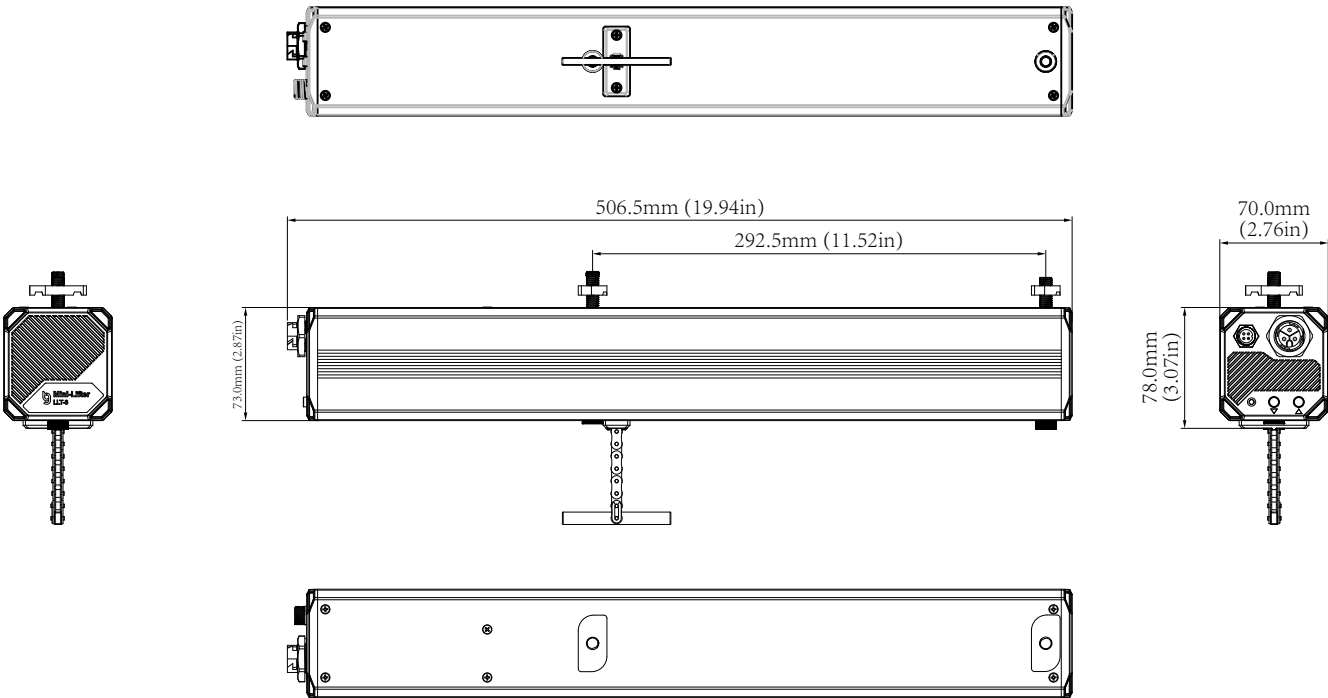

FC RoHS