

◆ SPECIFICATIONS

PPF:	Up to 2160 μmol/s
Efficacy:	Up to 3.0 μmol/J
Input Power:	720 W
Power Factor:	≥ 96%
Fixture Dimensions/Weight:	44.98"L x 45.5" W x 5.30" H / 31.1 lbs
Mounting Height:	> 6" (15.2cm) Above Canopy
Lifetime:	L90 : > 54,000 hrs
Warranty:	5 Years Standard Warranty
Input Voltage:	Autosensing 100-277 V~
Amp Draw:	120V/6.23A, 240V/3.09A, 277V/2.71A
Group Control:	YES


◆ FEATURES

- Group Control
- External Controllability
- 4 Adjustable Spectrum Channels
- Plug and Play
- On-board Dimming
- Outstanding Efficacy up to 3.0 μmol/J


◆ MODEL-H PLUS 4'

Tested at 6" / Tested at 12"

Average PPFD 1254 / 1050

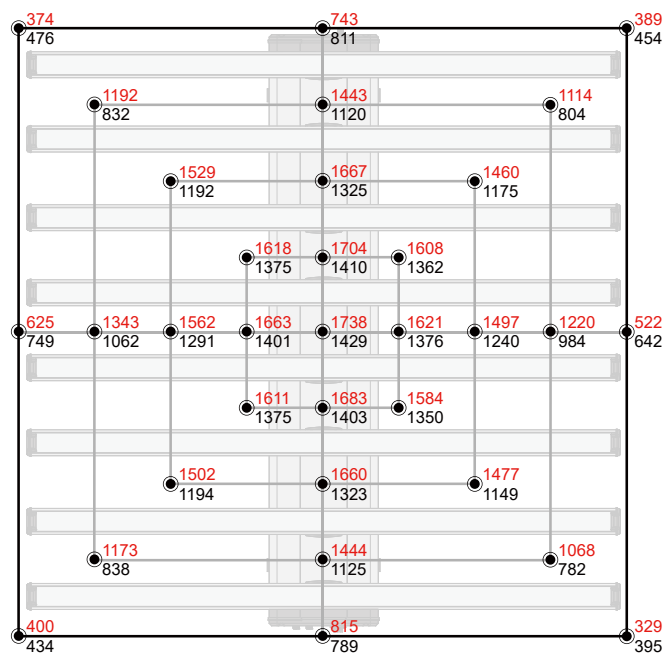


◆ DIMENSIONS

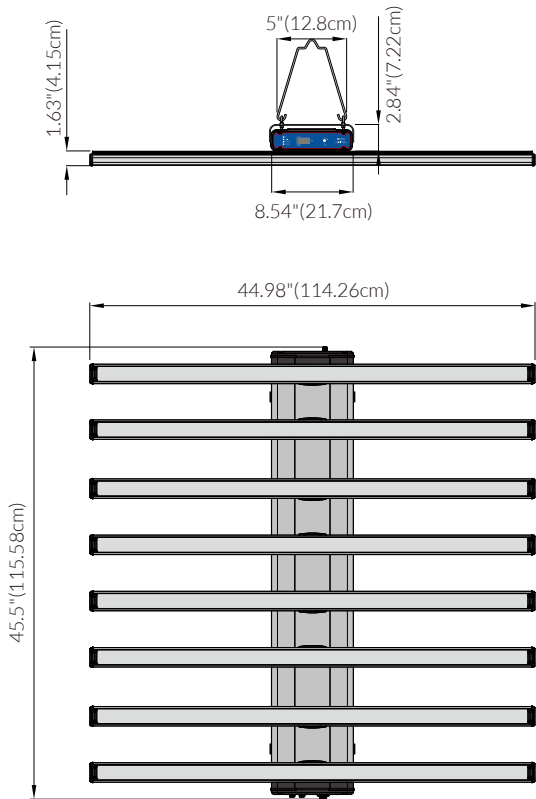


◆ SPECTRUM


Efficacy: Up to 3.0 μmol/J

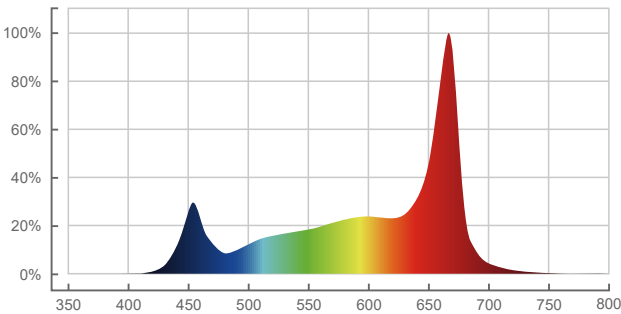

Efficacy: Up to 2.9 μmol/J

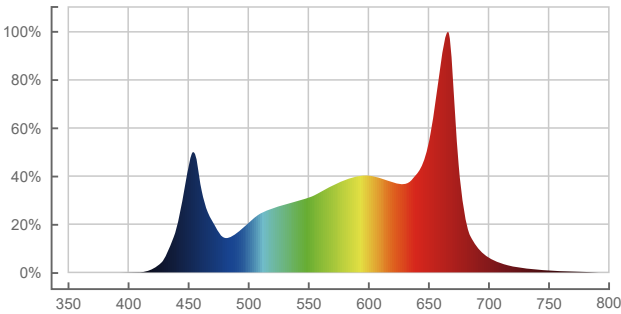

Efficacy: Up to 2.8 μmol/J

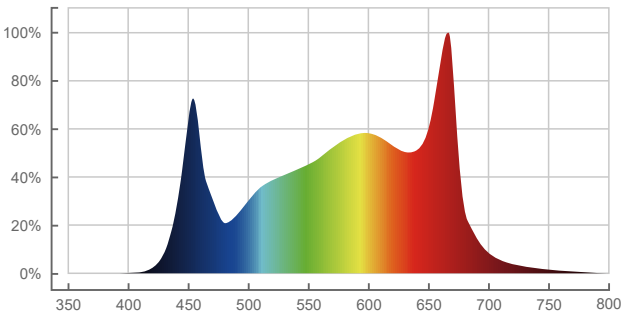

MODEL-H PLUS 4' (480V)

LED Grow Light

◆ SPECIFICATIONS

PPF:	Up to 2160 μmol/s
Efficacy:	Up to 3.0 μmol/J
Input Power:	720 W
Power Factor:	≥ 96%
Fixture Dimensions/Weight:	44.98"Lx 45.5" W x 5.30" H / 31.1 lbs
Mounting Height:	> 6" (15.2cm) Above Canopy
Lifetime:	L90 : > 54,000 hrs
Warranty:	5 Years Standard Warranty
Input Voltage:	Autosensing 347-480 V~
Amp Draw:	2.09A@347V, 1.55A@480V
Group Control:	YES


◆ FEATURES

- Group Control
- External Controllability
- 4 Adjustable Spectrum Channels
- Plug and Play
- On-board Dimming
- Outstanding Efficacy up to 3.0 μmol/J


◆ MODEL-H PLUS 4' (480V)

Tested at 6" / Tested at 12"

Average PPFD 1254 / 1050

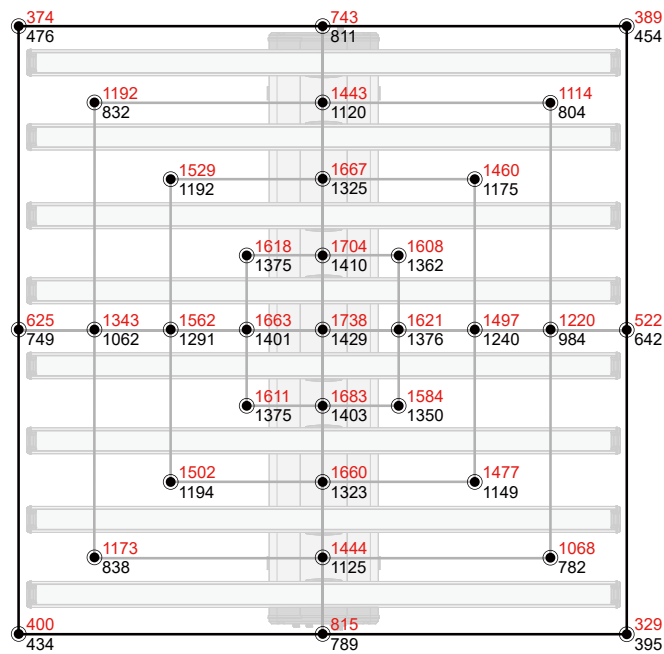


◆ DIMENSIONS

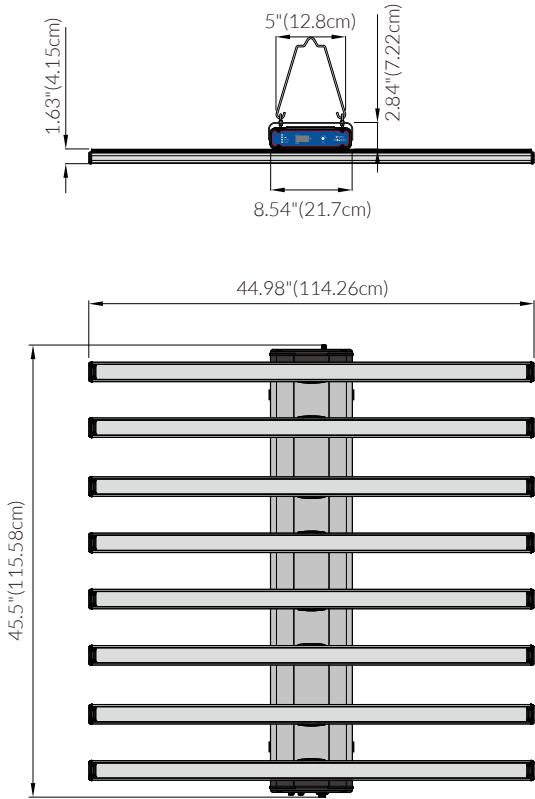


◆ SPECTRUM

Efficacy: Up to 3.0 μmol/J

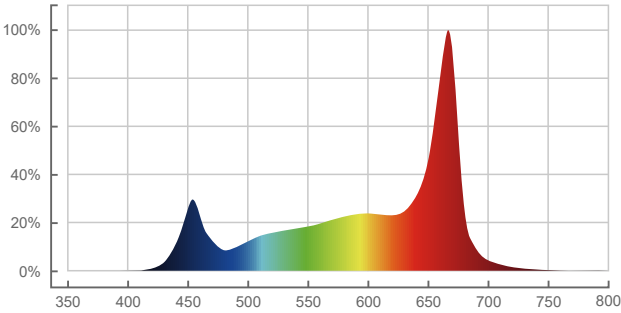

Efficacy: Up to 2.9 μmol/J

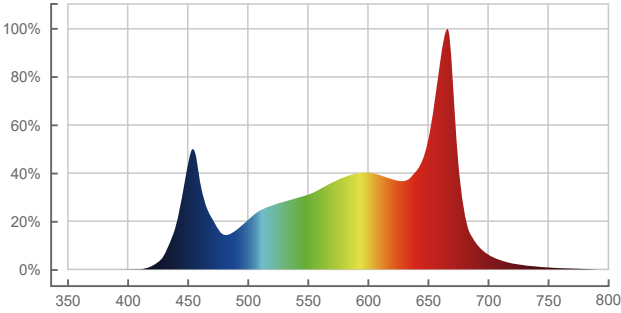

Efficacy: Up to 2.8 μmol/J

